
CHANGING THE SUPERLIFT™ TINE ATTACHMENT LEGS

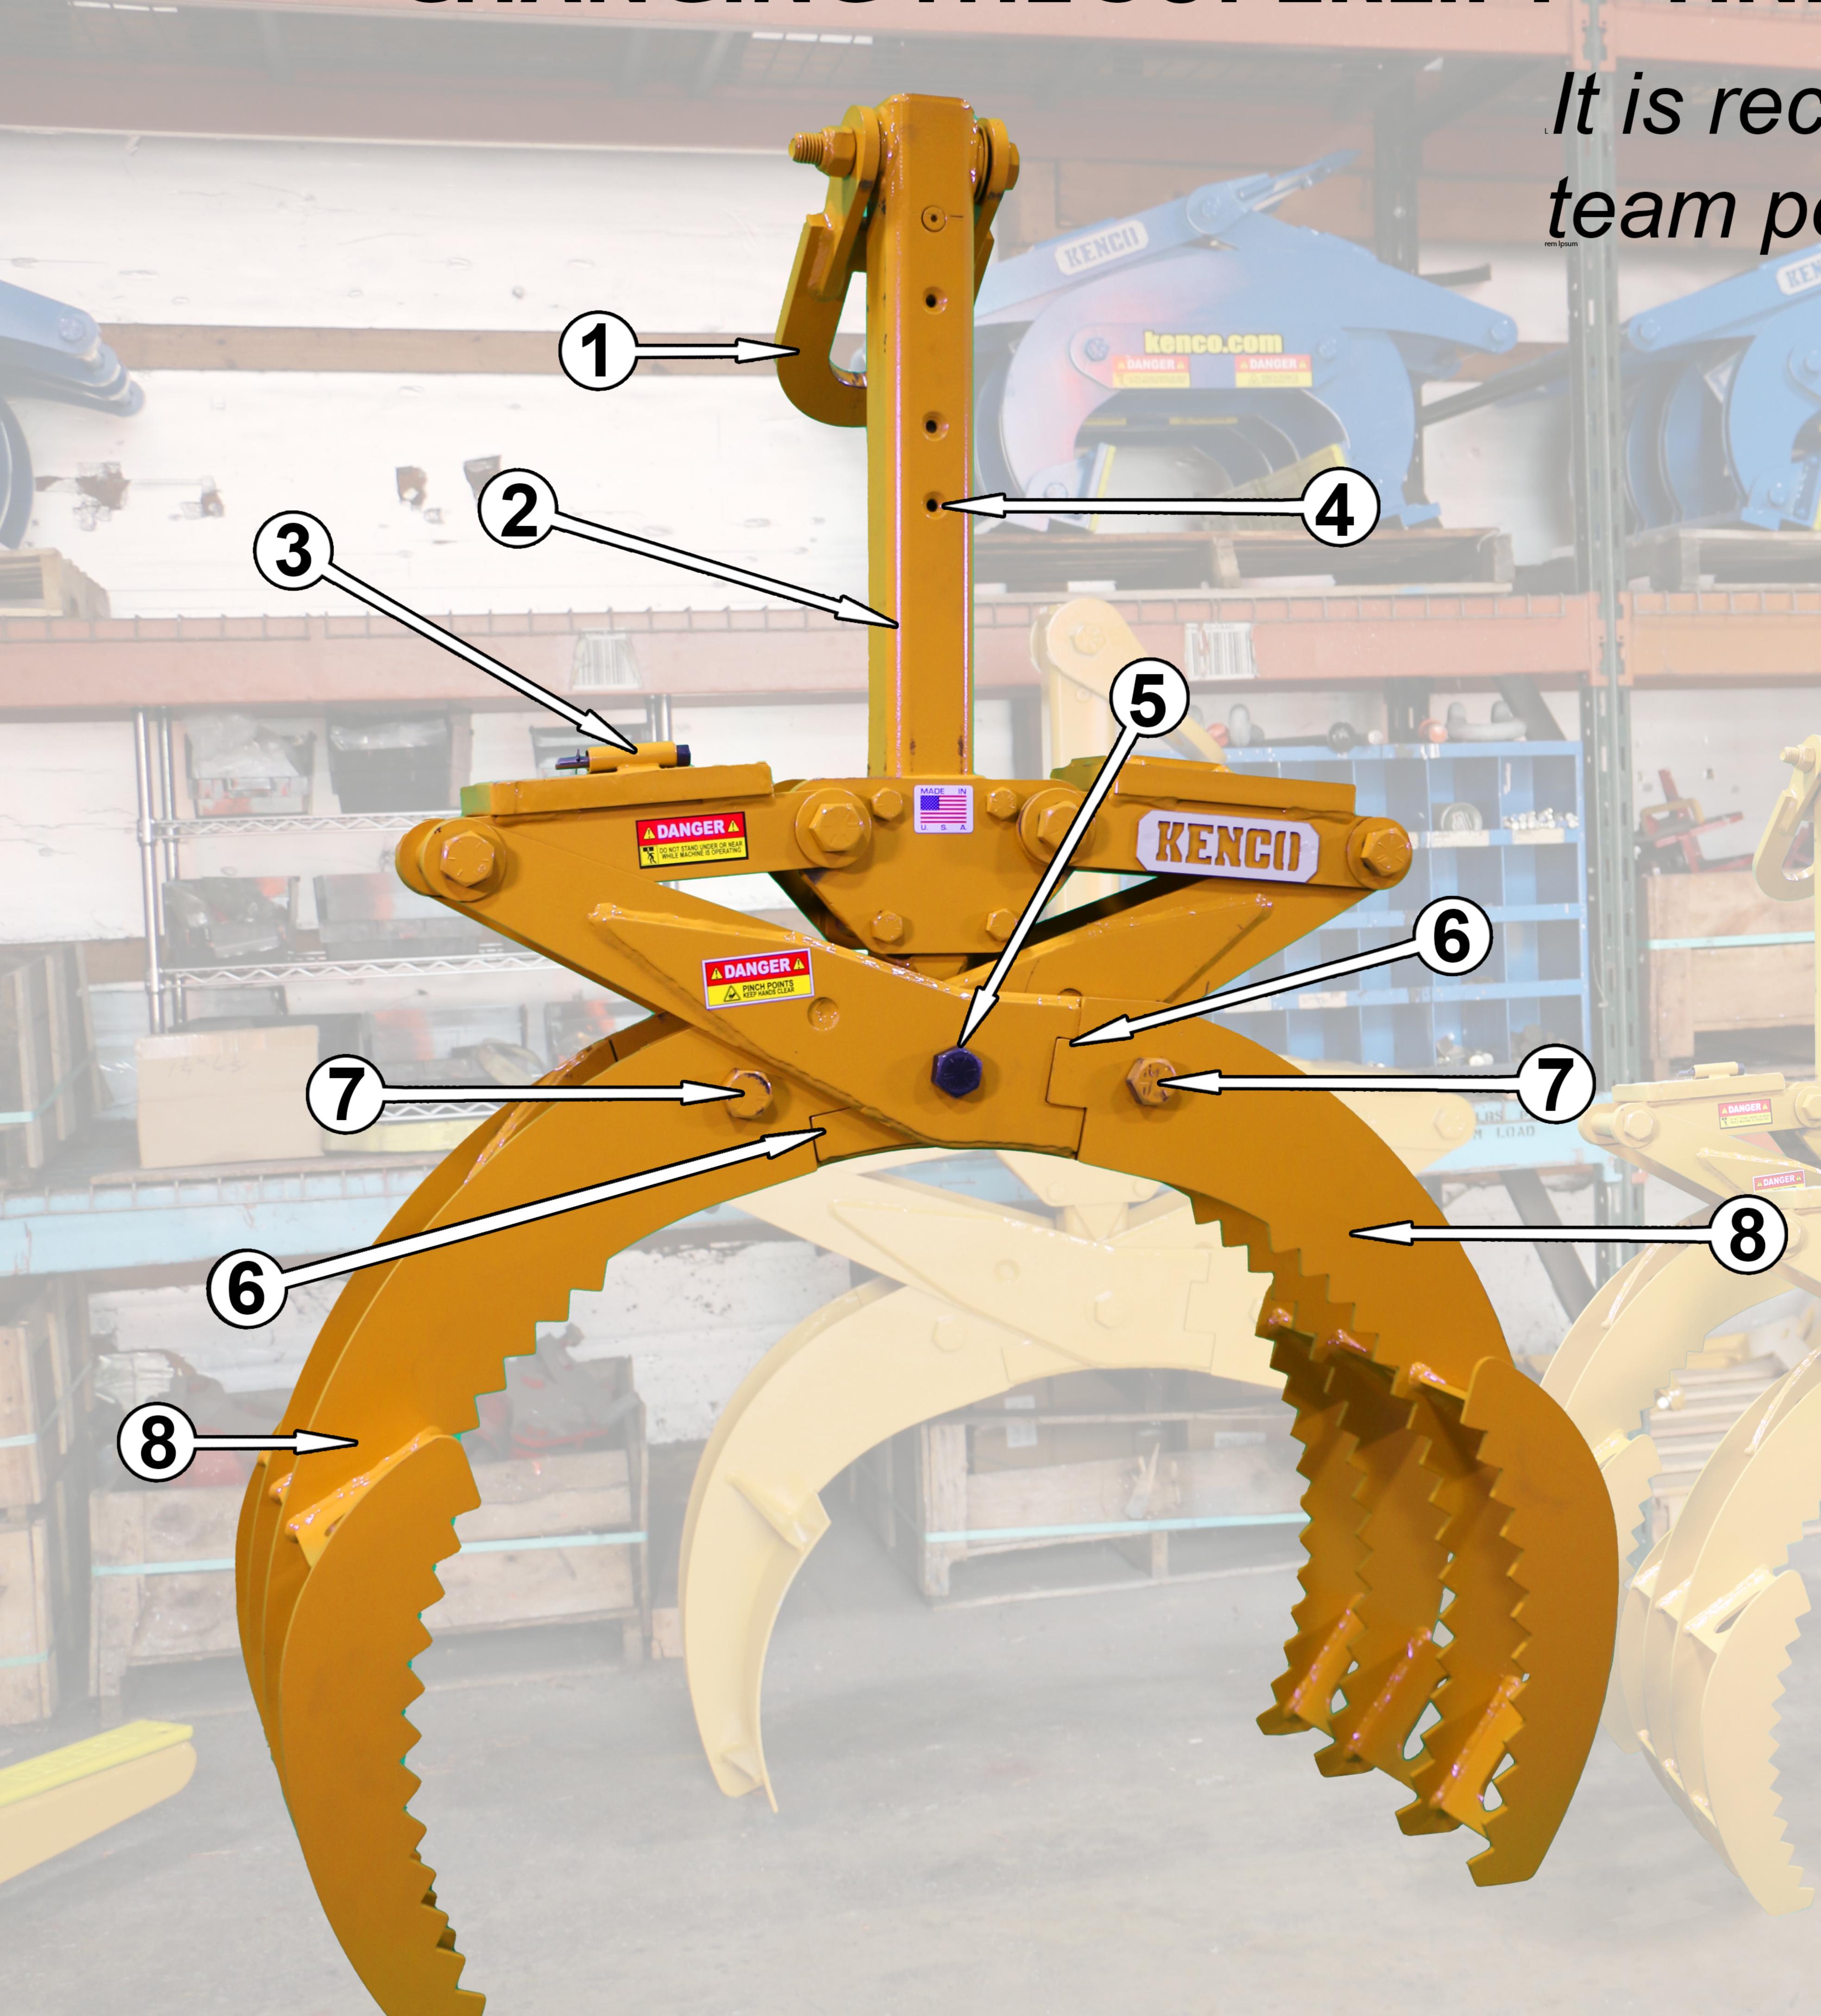

It is recommended that a two person team perform these instructions.

SUPERLIFT PARTS AND COMPONENTS

- 1 Lifting Eye
- 2 Main Body Tube
- 3 Lock off pin and holder
- 4 Lock off pin holes
- 5 Main pivot bolt
- 6 Interlocking keyways
- 7 Tine bolts
- 8 Tine attachment legs

8 EMSKEDED

- Rigging
- Machine with sufficient capacity to handle the weight of the lifter
- 1½ inch wrench / socket
- Crow bar / prying device

